
Second Skin Audio Luxury Liner Mass Loaded Vinyl, 1 lb/sq ft

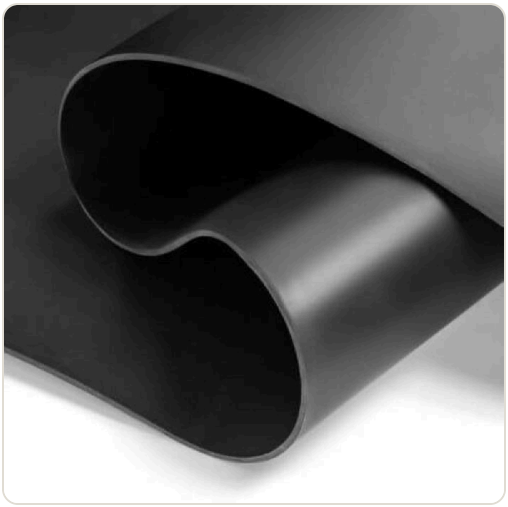

Dimensions	?″ W × ?″ H × 0.125″ D
Where it goes in UNIT5.xyz	Fastened over the studs behind the interior liner, or on the inside of the wall panels; seal the seams.

The manufacturer's spec sheet follows on the next page.

second skin
auto & home insulation

SECONDSKINAUDIO.COM
1.800.679.8511
SERVICE@SECONDSKINAUDIO.COM

Luxury Liner™ Mass Loaded Vinyl

SPEC SHEET


- Mass Loaded Vinyl Noise Barrier
- Do-It-All Soundproofing Material
- Flexible (1lb) and Durable
- 1lb or 2lb Density
- Extremely Thin
- Made in the USA




Material:	Mass Loaded Vinyl (PVC Plastic)
Patterns:	Smooth, Dense Sound Barrier
Features:	Excellent Soundproofing with Thin Material, Flexible, Durable, Cost-Effective, Fire Resistant, High Tensile Strength
Application:	Homes, Condos, Apartments, Pipes, Fences, HVAC Ducts, Enclosures and Boxes, Mechanical Rooms, Manufacturing Facilities, Offices, Conference Rooms, Airports, Bars, Restaurants, Music Rooms, Warehouses, Automotive
Weight (Thickness):	1 lb / sq ft (1/8" thick), 2 lb / sq ft (1/4" thick)
Sizes (1 lb):	4' x 4', 4' x 8', 4' x 10', 4' x 15', 4' x 25', 4.5' x 10', 4.5' x 20', 4.5' x 30' (Master Rolls Available by Request)
Sizes (2lb):	4' x 12', 4' x 15', 4' x 25', 4.5' x 10', 4.5' x 15' (Master Rolls Available by Request)
Tensile Strength:	400 psi (Standard) | Elongation: 120% | Tear lbs / 1": 77
Color:	Black
Temperature Rating:	Up to 175°F
Flammability:	FMVSS 302 (Pass), UL Approved Available on Request
Installation:	Mechanical Fasteners, Vinyl Contact Cement

Sound Transmission Loss

Product	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	STC
Luxury Liner™ MLV 1 lb	14	19	22	27	32	37	26
Luxury Liner™ MLV 2 lb	19	20	27	34	38	43	32

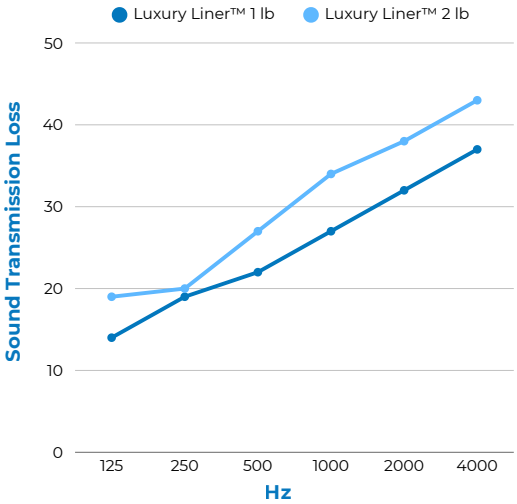

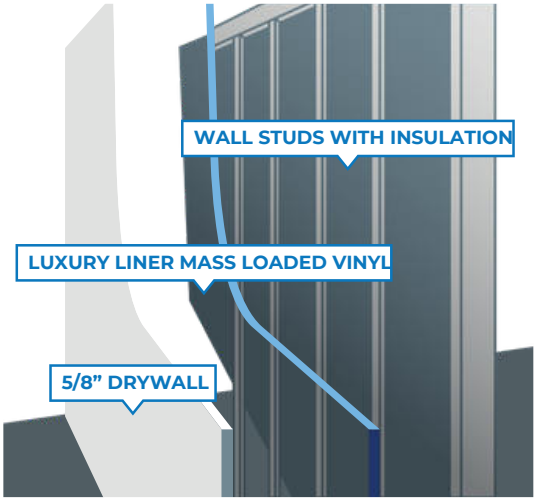



second skin auto & home insulation

TO ORDER THIS PRODUCT VISIT:
Luxury Liner™ 1 lb Mass Loaded Vinyl Rolls
Luxury Liner™ 2 lb Mass Loaded Vinyl Rolls